




jalas® GRAN PREMIO 1848 TITAN

EN ISO 20345:2011 S3, SRC, CI, HRO, HI ASTM F2413-18 M/I/C SD 35 PR

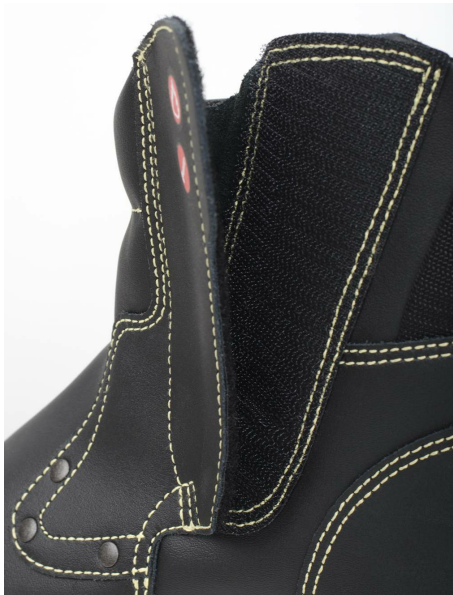

Learn more

Titan+ means safety in a half-length safety boot with highest protection (S3) for hazardous environments in complete comfort. The PU-coated leather upper with Kevlar® seams resists heat of up to 204° C for extended periods of time. The oil and heat-resistant nitrile outer sole means excellent grip and JALAS® aluminium toe cap, steel puncture protection and double impact protection zones in PORON® XRD® help prevent injuries.

CHARACTERISTICS	FUNCTIONS	
• Highest level of protection • Excellent grip • Perfect fit • Extra comfortable • Excellent shock absorption	• ProNose toe reinforcement • Wide fit • KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit) • Heat-resistant upper • Heat-resistant outsole • Oil-resistant outsole • Anti-static properties • Padded boot shaft • Double shock absorption zones	• Ventilating insole • Pull loops • Water repellent



PREVENTS RISK OF

toe injuries, nail penetration, antistatic

PRIMARY ENVIRONMENTS OF USE

outdoors, indoors, all-year use, warm surfaces, environments with risk for outsole penetration

PRIMARY AREAS OF USE

sheet-metal work, metalwork, welding, hot work

PRIMARY INDUSTRIES OF USE

metal fabrication

SPECIFICATION

TYPE Safety footwear, Boots/Ankle boots

CATEGORY Cat. II

NAIL PROTECTION MATERIAL Steel

FITTING Wide

COLLECTION Gran Premio

UPPER MATERIAL PU-coated leather

PRONOSE MATERIAL PU

TOECAP MATERIAL Aluminium

LINING MATERIAL Polyester

INSOLE FX2 Pro

INNERSOLE MATERIAL Textile, Soft EVA, Polyester-based conductive thread, Double shock absorption zones in Poron® XRD®

MIDSOLE MATERIAL PU midsole

OUTSOLE MATERIAL Nitrile rubber outsole

FASTENING Hook-and-loop

COLOUR Black

NET WEIGHT, (SIZE 42) 1.34 kg

COMPLIANCE



Cat. II

EN ISO 20345:2011
S3, SRC, CI, HRO, HI



ASTM F2413-18
M/I/C
SD 35 PR

TP TC 019:2011



ÖNORM Z 1259



DGUV 112-191

FEATURES



Anti-static properties



Ergothan Shock Absorption System



Heat-resistant upper



Aluminium toecap



Oil-resistant outsole



ProNose toe reinforcement



Wide fit



Heat-resistant outsole



Water repellent



Nail protection in steel

SIZE				ARTICLE NUMBER	EAN
EU	UK	US M	US W		
36	3	4	5	1848-36	6408487501302
37	4	5	6	1848-37	6408487501319
38	5	5½	6½	1848-38	6408487501326
39	6	6½	7½	1848-39	6408487501333
40	6½	7½	8½	1848-40	6408487501340
41	7	8	9	1848-41	6408487501357
42	8	9	10	1848-42	6408487501364
43	9	9½	11	1848-43	6408487501371
44	10	10½	11½	1848-44	6408487501388
45	10½	11	12½	1848-45	6408487501395
46	11	12	13	1848-46	6408487501401
47	12	13	14	1848-47	6408487501418
48	13	13½	14½	1848-48	6408487501425

ejendals

Limavägen 28, SE-793 32 Leksand, Sweden

Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com